

ON COURSE ETIQUETTE



CARTS

- Utilize paths around greens and tees where provided; obey and follow signs
- Keep carts out of long grass areas (accent fescues)
- Blue Flag - enter and park cart on approach, no closer than 30ft from the green; following completion of the hole return to cart path
- Pull carts and power caddies are not to be pulled across tees/greens or between greens and bunkers

LIGHTNING (THORGUARD)

- The system will sound one prolonged blast (15 seconds) signaling suspension of play, strobe lights will flash above the horn clusters
- The horn clusters and strobe lights are located to the left of 6 tee, right side of 13 green and on top of the Proshop
- In the event of a storm under red alert, immediately seek shelter at the Clubhouse, the Proshop, or in the course washrooms
- Avoid open areas, water, tall trees, metal fences, overhead wires and power lines, elevated ground, golf carts, mowers, cellular phones and radios

SAFETY

- Give warning to other golfers of a wayward shot by shouting fore
- Alert Greenskeepers nearby prior to making a stroke that might endanger them
- Before entering the range to play a shot, please ring the bell located at the bottom of the hill on hole 10 or adjacent to the creek on hole 14

BUNKERS

- Avoid climbing steep slopes; enter/exit from the lowest side
- Hold rake with two hands
- Push sand forward rather than pulling [pulling sand displaces sand]
- Smooth area and level as much as possible for the next golfer

BALL MARKS

THE PROPER WAY TO REPAIR A BALL MARK

A few extra seconds is all it takes to keep putting greens looking and playing their best.



1



Use a prolonged ball mark repair tool (preferably), knife, key or tee.

2



Insert at the edges of the mark – NOT THE MIDDLE OF THE DEPRESSION.

3



Bring the edges together with a gentle twisting motion, but don't lift the center. TRY NOT TO TEAR THE GRASS.

4



Smooth the surface with a club or foot. YOU'RE DONE WHEN IT'S A SURFACE THAT YOU WOULD PUTT OVER.


DIVOTS

- Both replacing your divot or filling the void with sand are acceptable practices at Cutten Fields
- Sand and seed bottles are available on carts and also accessible to walkers, fill stations can be found at 1, 2, 5, 10, 13

REPLACE OR FILL: The easy guide to proper divot repair.

REPLACE


When the divot is still intact with soil attached.

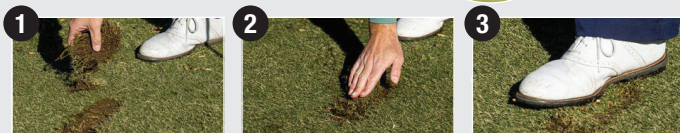

Place the divot back in the scar. Press with your foot to enhance the rooting.

FILL

When the divot is shattered with no soil attached.

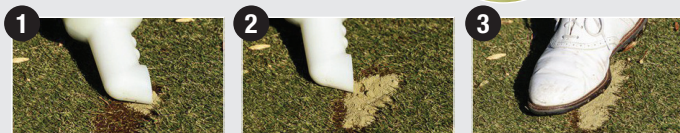

Fill to ground level without overfilling. Press with your foot to compact and level the mix.

USGA